



FEATURES



Optional: Protection guard

- Operator safety
- Time and cost savings due to its easy handling
- Robust structure
- Transportable by forklift or overhead crane
- Compatible with a wide range of mould sizes
- Easy maintenance
- Available in different options (customizable according to your requests)

FOR THE SAFE HANDLING/ROTATION OF HEAVY INJECTION MOULDS, DIES AND OTHERS

THE PROBLEM

Problems with conventional rotating and turning equipment:

- Potential damage to expensive tools
- Damage to hoist brakes and ropes

THE BENEFITS OF THE TOOL MOVER

- The load is turned over at its center of gravity to ensure a smooth transition
- The table has a frequency-controlled drive for soft starting/stopping
- Minimizes the risk of damage to expensive molds or tools
- No risk for the operator

CHARACTERISTICS OF THE TOOL MOVER

- The TOOL MOVER can be easily relocated since it is not anchored to the floor and is very compact in size
- The TOOL MOVER can be moved with a hoist (lifting points) or lift truck (fork insertion points)
- The TOOL MOVER'S table has a low supporting surface, allowing the open tool to be cleaned while on the table itself
- The TOOL MOVER can be equipped with PU plates to protect the tool
- The TOOL MOVER can handle tools and objects weighing up to 64 tons
- The TOOL MOVER includes a siren to indicate when the table is in operation









TABLE DIMENSIONS*

TYPE	TABLE SURFACE IN MM			MAXIMUM LOAD CAPACITY IN KG	WEIGHT APPROX IN KG
		Н	W		
TM 10	1.300	1.300	1.300	10.000	1.550
TM 16	1.600	1.600	1.600	16.000	4.400
TM 20	1.600	1.600	1.600	20,000	4.450
TM 25	2.500	2.500	2.500	25.000	11.350
TM 32	2.500	2.500	2.500	32.000	11.400
TM 64	3.500	3.500	2.500	64.000	22.000

CONSTRUCTION

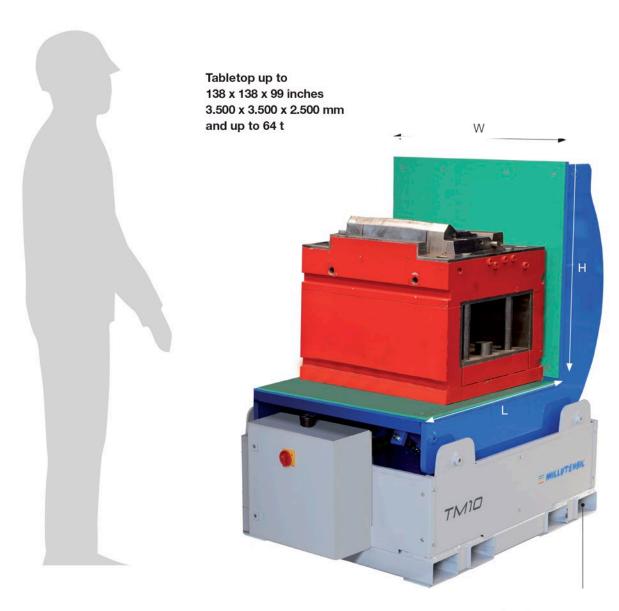

Can be moved with a hoist or forklift

The TOOL MOVER is available in the following standard sizes (L x H x W):

- 51 x 51 x 51 inches
- 63 x 63 x 63 inches
- 99 x 99 x 99 inches
- 138 x 138 x 99 inches
- 1.300 x 1.300 x 1.300 mm
- 1.600 x 1.600 x 1.600 mm
- 2.500 x 2.500 x 2.500 mm
- 3.500 x 3.500 x 2.500 mm

*Other sizes are available on special order

TOOL MOVER CONTROL UNITS

Two-hand operating device



OPTIONAL ATTACHMENTS AND SAFETY EQUIPMENT



TOOL MOVER GUARD BRACKET

Bracket construction as distance protection for the operator

- Bracket construction for the front danger area
- Bracket construction for the rear danger area





TOOL MOVER PROTECTION

- Protects the operator from interference in danger area (risk of crushing)
- Yellow / black protective sheet





LIFTING POINTS

VWBG-V Load ring, UNC thread. rotating 360°, pivoting 230° ball bearing






TOOL MOVER CONTROL UNITS

Wireless operating device





TOOL MOVER TABLETOP

- Tabletop of polyethylene
- Optional: anti-slip support Made of steel mesh / polyurethane

Moveable extensions of the table are available on request



INQUIRY Please scan it and send it by email to info@millutensil.com

Company name			Phone number		
Name and surname of contact person			VAT registration number		
Address			Tax code		
Street		Number	Lenght of the mould		
City			Width of the mould		
Postal code Country			Height of the mould		
E-mail address			Weight of the mould		
Message					

BLUE LINE

MOULD SPOTTING PRESSES AND DIE SPLITTERS





DIE & MOULD SPOTTING PRESSES BV SERIES



GREEN LINE

AUTOMATION FOR SHEET METAL PROCESSING





YELLOW LINE

MODULAR CONVEYOR BELTS





