



CHARACTERISTICS



Optional: Protection guard

- Safety for the operator
- Easy operation for time and cost savings
- Robust construction
- Flexible application (transportable by hoist or forklift)
- Compatible for a vast range of toolsizes
- Easy to service
- Numerous options (tailor made for your application)

FOR THE SAFE HANDLING/ROTATION OF HEAVY INJECTION MOULDS, DIES AND OTHERS

THE PROBLEM

Problems with conventional rotating and turning equipment:

- Potential damage to expensive tools
- Damage to hoist brakes and ropes

THE BENEFITS OF TOOL MOVER

- The load is turned over at its center of gravity to ensure a smooth transition
- The table has a frequency-controlled drive for soft starting/stopping
- Minimizes the risk of damage to expensive molds or tools
- No risk for the operator


CHARACTERISTICS OF TOOL MOVER

- The TOOL MOVER is versatile and can be easily relocated since it is not anchored to the floor and is very compact in size
- The TOOL MOVER can be moved with a hoist (lifting points) or lift truck (fork insertion points)
- The TOOL MOVER'S table has a low supporting surface, allowing the open tool to be cleaned while on the table itself
- The TOOL MOVER can be equipped with PU plates to protect the tool
- The TOOL MOVER can handle tools and objects weighing up to 64 tons
- The TOOL MOVER includes a siren to indicate when the table is in operation

TABLE DIMENSIONS*

ТҮРЕ	TABLE SURFACE IN INCHES / MM			MAXIMUM LOAD CAPACITY IN KG	WEIGHT APPROX IN KG
	L	Н	W		
TM 10	39 / 1.000	39 / 1.000	39 / 1.000	10,000	1,550
TM 16	63 / 1.600	63 / 1.600	63 / 1.600	16,000	4,400
TM 20	63 / 1.600	63 / 1.600	63 / 1.600	20,000	4,450
TM 25	99 / 2.500	99 / 2.500	99 / 2.500	25,000	11,350
TM 32	99 / 2.500	99 / 2.500	99 / 2.500	32,000	11,400
TM 64	138 / 3.500	138 / 3.500	99 / 2.500	64,000	22,000


^{*}Other sizes are available on special order



CONSTRUCTION



Tabletop up to 138 x 138 x 99 inches 3.500 x 3.500 x 2.500 mm and up to 64 t

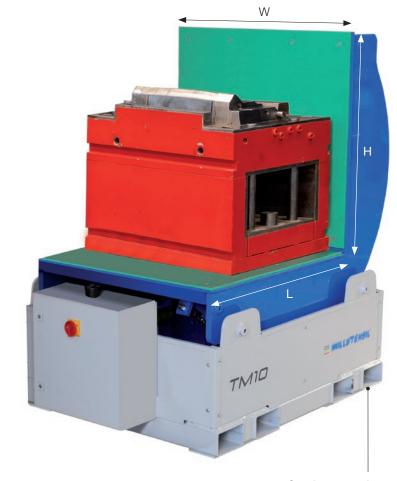

Can be moved with a hoist or forklift

The TOOL MOVER is available in the following standard sizes (L x H x W):

- 39 x 39 x 39 inches
- 63 x 63 x 63 inches
- 99 x 99 x 99 inches
- 138 x 138 x 99 inches
- 1.000 x 1.000 x 1.000 mm
- 1.600 x 1.600 x 1.600 mm
- 2.500 x 2.500 x 2.500 mm
- $-3.500 \times 3.500 \times 2.500 \text{ mm}$

*Other sizes are available on special order



Standard mobile operating device

OPTIONAL ATTACHMENTS AND SAFETY EQUIPMENT



TOOL MOVER GUARD BRACKET

Bracket construction as distance protection for the operator

- Bracket construction for the front danger area
- Bracket construction for the rear danger area





TOOL MOVER PROTECTION

- Protects the operator from interference in danger area (risk of crushing)
- Yellow / black protective sheet





LIFTING POINTS

 VWBG-V Load ring, UNC thread. rotating 360°, pivoting 230° ball bearing





TOOL MOVER CONTROL UNITS

- Two-hand operating device
- Wireless operating device





TOOL MOVER TABLETOP

- Tabletop of polyethylene
- Optional: anti-slip supportMade of steel mesh / polyurethane

Moveable extensions of the table are available on request



INQUIRY Please scan it and send it by email to info@millutensil.com

Company name			Phone number		
Name and surname of contact person			VAT registration number		
Address			Tax code		
Street	Nu	umber	Lenght of the mould		
City			Width of the mould		
Postal code	Country		Height of the mould		
E-mail address			Mainta of the area del		
E-mail address			Weight of the mould		
Message					

BLUE LINE

MOULD SPOTTING PRESSES AND DIE SPLITTERS





DIE & MOULD SPOTTING PRESSES BV SERIES



GREEN LINE

AUTOMATION FOR SHEET METAL PROCESSING





YELLOW LINE

MODULAR CONVEYOR BELTS









